

Quicksert Asymmetric 24mm Asymmetric Projector

Installed at nadir point under handrail. Forward projection only, zero rear light spill.

Features our PUSH FIT technology for easy installation / extraction

All parts 316 Marine Grade Stainless Steel

Flush fit into 24mm aperture. Face machined to match tube radius

Lamp: 1.3w OSRAM LED 36v (350ma 2.85fV)

Installed flux: 145 lumens 350ma

CCT: 2700K/3000K/4000K

CRI 80 (min.), 82 (typ.)

Rated life: 100,000 hours L80B10 50,000 hours

Lens options: 16-94degrees

Azimuth: 0-35 degrees

Ingress protection: IP67

Impact resistance: IK10 +

Anodic index: 0.55 nom.

Weight: 105grms

Supplied with 200mm Red /Black PTFE cable.

12-36v operation: 1.4watt with Dc-Dc Converter

36v version:


LED driver matched to circuit design

Dimming and emergency options available

Pre-made wiring loom service



Azimuth: 35 degree azimuth
Lens: 70 degree

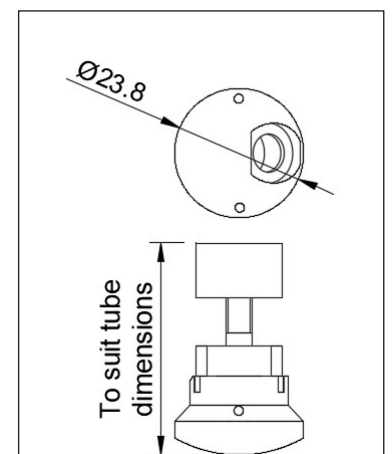

5 Year replacement part Warranty

Transit Handrail Lighting Ltd www.transitlighting.co.uk +442081500015

