

Quicksert 18mm Symmetrical Projector

Installed at an angle within the handrail to achieve asymmetric projection

Features our PUSH FIT technology for easy installation / extraction

All parts 316 Marine Grade Stainless Steel

Flush fit into 18mm aperture. Face machined to match tube radius

Lamp: 1w OSRAM LED (350ma 2.85fV)

Installed flux: 145 lumens 350ma 3000K
185 lumens 500ma 3000K

CCT: 2700K/3000K/4000K
CRI 80 (min.), 82 (typ.)

Rated life: 100,000 hours L80B10 50,000 hours (350ma)

Lens options: 16-94degrees

Azimuth: 0-35 degrees

Ingress protection: IP67

Impact resistance: IK10 +

Anodic index: 0.55 nom.

Weight: 70grms


Supplied with 200mm Red /Black PTFE cable.

12-36v operation: 1.3watt with Dc-Dc Converter


LED driver matched to circuit design

Dimming and emergency options available

Pre-made wiring loom service

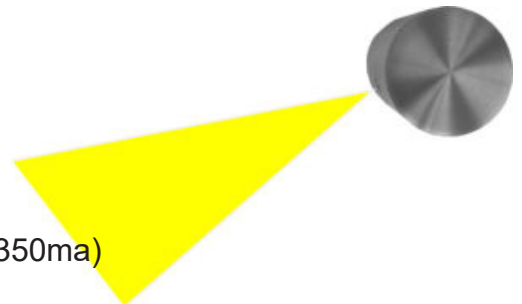

Install at optimum angle for projection across target surface

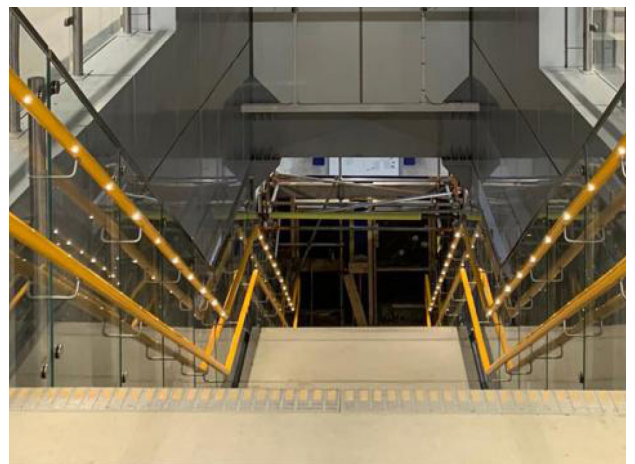

5 Year replacement part Warranty

Transit Handrail Lighting Ltd

www.transitlighting.co.uk +442081500015

